


Compact multilanguage owner's manual

Model Two

TIVOLI
AUDIO™

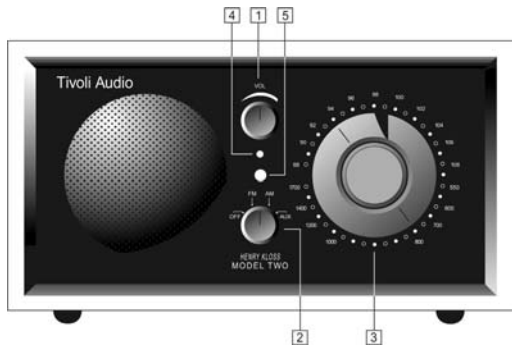

1. VOLUME: Turn the volume knob to the right to increase the volume or to the left to decrease the volume of the Model Two's speakers. This knob will also control the volume of headphones when connected.

2. OFF/FM/AM/AUX: Turn the knob 1 click to the right to select the FM band, 2 clicks to the right to select the AM band, or 3 clicks to the right to select the Aux input.


3. TUNING: Turn the tuning dial to the right or to the left to change the frequency range.

4. POWER LIGHT: Glows green when the unit is active.

5. TUNING INDICATOR: Glows bright amber when best tuning has been achieved. Some listenable AM stations will not light the tuning indicator and should be tuned by ear for the clearest signal.

WARNING

1. For your safety, keep the Model Two a safe distance away from a naked flame, such as a lit candle.
2. The recommended operating temperature range for the Model Two is 5 degrees C - 40 degrees C.
3. The 12-16VDC input is suited for operating the Model Two in a boat or camper using an optional 12VDC, 2A fused adaptor.

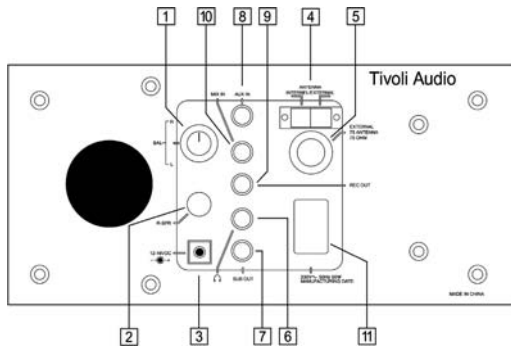

1. BALANCE: Turn the balance knob upward to hear the right speaker, downward to hear the left speaker. The center detent provides equal balance between the two speakers.

2. R-SPR: Connect the RCA cable from the companion right speaker to this input. As the Model Two is not magnetically-shielded, keep the companion speaker and the main unit at least 3" from a computer monitor or television set.

3. 12VDC: Use this input to operate the Model Two from a DC power supply.

4. ANTENNA SWITCH: Switch between internal and external FM antennae. This switch has no affect on AM reception.

5. EXTERNAL FM CONNECTION: The Model Two has built-in AM and FM antennae. To improve FM reception, insert the end of the supplied wire antenna into the center of this "F" connector and set the switch to "EXTERNAL". Adjust the wire for best reception. See section marked "Reception" for more information.

6. HEADPHONE: Connect a headset to this stereo output for private listening. The headphone volume will be controlled by the Model Two's volume knob. Connecting a pair of headphones will mute the Model Two's speakers. This jack accepts a 1/8" male stereo mini plug.

7. SUB OUT: Connect a powered subwoofer to this output for enhanced bass. This jack accepts a 1/8" male stereo mini plug.

8. AUX IN: To hear the audio from another device (CD player, television, etc.) through the Model Two's speakers, connect the device to this stereo input. This jack accepts a 1/8" male stereo mini plug.

9. REC OUT: You may record from the Model Two by connecting a cassette deck or other recording device to this fixed-level, stereo output. You may also use the Model Two as an AM/FM tuner by connecting a receiver or integrated amplifier to this output. The Model Two's speakers will not be muted when using this output. This jack accepts a 1/8" male stereo mini plug.

10. MIX IN: Connect you computer's audio output (or other device) to this stereo input to hear audio mixed -in with either the tuner or Aux device if one is connected. The volume level of this input must be adjusted at the source. This jack accepts a 1/8" male stereo mini plug.

11. 230V-50HZ 50W: Connect the supplied power cord to this jack.



1. LAUTSTÄRKE: Drehen Sie den Lautstärkeregler zur Steigerung der Lautstärke nach rechts und zur Reduzierung der Lautstärke nach links. Der Regler dient ebenfalls zur Einstellung der Lautstärke eines evtl. angeschlossenen Kopfhörers (Sonderzubehör).

2. WAHLSCHALTER OFF / FM / AM / AUX: Drehen Sie diesen Wahlschalter aus der OFF-Stellung auf die Position 1 zur Einstellung auf den Bandbereich FM und auf die Position 2 zur Einstellung auf den Bandbereich AM oder auf die Position 3 zur Selektion des Hilfeingangs.

3. SENDERSUCHER: Drehen Sie diesen Regler nach links oder rechts, um in den Frequenzbereichen FM und AM nach Sendern zu suchen.

4. LED EIN /AUS: Diese grüne Kontrollleuchte leuchtet auf, wenn das Gerät eingeschaltet ist.

5. ABSTIMMUNGSANZEIGE: Bei optimaler Abstimmung leuchtet diese Kontrollleuchte hell auf. Diese Anzeige könnte bei bestimmten AM-Stationen mit schwachem Signal nicht funktionieren, so daß Sie die Abstimmung nach Gehör vornehmen müssen.

For warranty and information outside of USA please contact your local distributor:
<http://www.tivoliaudio.com>